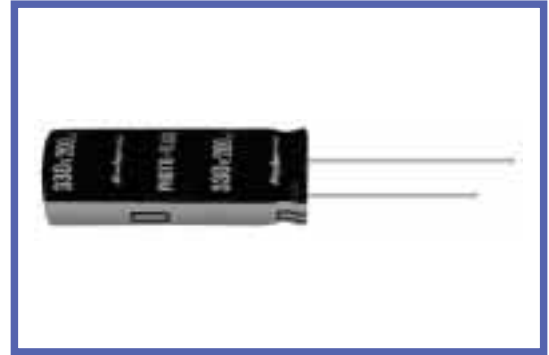


FW SERIES
Electrolytic capacitors for photoflash applications with lead wire.
◆ FEATURES

The lead wire terminal facilitates board mounting operations.

◆ CAUTION


These Rubycon Photo Flash Capacitors are designed, manufactured and intended solely for use in photo flash and other photographic equipment. They are not intended for use in medical equipment. Rubycon Corporation, Rubycon America, Inc., and Shin-Ei Capacitor Foil Company, Ltd. expressly disclaim any warranties or representations as to the suitability or fitness of these capacitors for use in medical equipment.


◆ SPECIFICATIONS

Items	Characteristics	
Operating Temperature Range	-20~+55°C	
Rated Voltage Range	330V.DC	
Surge Voltage	350V.DC	
Capacitance Tolerance	-10~+20% (25°C, 120Hz)	
Leakage Current(MAX)	I=1xC (After 5 minutes application of rated voltage) I=Leakage Current(μA) C=Nominal Capacitance(μF)	
Dissipation Factor(MAX)	0.06 (25°C, 120Hz)	
Charge and Discharge	Charge and discharge at rated voltage at 5~35°C in every 30 seconds for 5000 times via Xe flash tube with discharge resistance of 0.7~1.0Ω.	
	Capacitance Change	Within ±10% of the initial value.
	Dissipation Factor	Not more than 150% of the specified value.
	Leakage Current	Not more than 150% of the specified value.
Shelf Life	Storage without voltage applied at 55°C for 1000 hours and measured at 25°C±5°C after voltage processing in JIS C 5102 item 4.4.	
	Capacitance Change	Within ±10% of the initial value.
	Dissipation Factor	Not more than 150% of the specified value.
	Leakage Current	Not more than 150% of the specified value.

◆ DIMENSIONS

(mm)

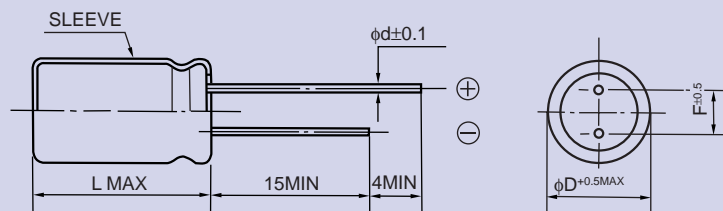

φD	10	10.5	11	12	12.5	13	13.5	14	14.5	15	15.5	16	17	18	20
F	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	7.5	7.5	7.5	7.5	7.5	7.5	7.5
φd	0.6	0.6	0.6	0.6	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8

Please check with us about individual size and dimensions.